



4. Optimisations of the existing product range

4.1 enhancement of product range by additional legs for more flexible use

4.2 enhancement of product range by additional scaffold spindles

4.3 mixed installation of various base constructions

4.4 approval of rolling risers up to 80 cm without diagonal bracing

4.5 simplified mounting of safety flap to weight girder

4.6 enhancement by tier height 16,66 cm with matching rails

4.7 3 ramp rail wedges for all cases

4.7.1 ramp rail wedge 7,5°

4.7.2 ramp rail wedge 5°

4.7.3 ramp rail wedge $\leq 3,44^\circ = 6\%$

4.8 enhancement of connecting options for rails

4.8.1 connection of ascent to stage at angle 180°

4.8.2 connection of ascent to stage at 90° angle - use of rails in special sizes

4.8.3 connection of ascent to stage at 90° angle - use of 10 cm rail

4.8.4 connection of ascent to stage at 90° angle - use of 15 cm rail

4.8.5 rails 10 cm and 15 cm in comparison

4.8.6 overview of eliminated rails

4.9 enhancement of connecting options with N-F links

4.9.1 N-F 110 mm leg distance for tier heights 20 & 16.66 cm

4.9.2 N-F 150 mm leg distance for tier heights 20 & 16.66 cm

4.10 adapter lath in new design

4.10.1 NEW and OLD adapter laths in comparison


4.10.2 retrofitting of adapter lath, old execution

4.10.3 connection to a fix object


4.10.4 safety instructions for using adapter laths

already part of the product range


Type of leg: LV 40
Material: alu
Adjustment range:



VS 40
alu
+/-3cm



TF 40-60
alu+steel
+/-3cm




Use for
tier height 20 cm


Expansion to use
for new tier height 16,66 cm

NEW in the product range for more flexible use

LV 33,33
alu



VS 33,33
alu
+/-3cm



KG 35
steel
+/-3cm



Use to date only
for ramp construction

Use for new
tier height 16,66 cm

Expansion
to use for tier height 16,66 cm and
to use for tier height 20 cm

In 2022 additional load distributor legs (LV) and levelling legs (VS) for tier height 16,66 cm for stage heights up to 133,33 cm complement the existing product range. Furthermore, additional ball bearing legs (KG) in a 5 cm grid with an adjustment range of +/- 3 cm (exception: 15 cm leg = +2/-1 cm) for stage heights up to 115 cm for ramp construction have been included. As the legs can be combined with each other, more possibilities open up for the required inclines and declines.

max. spindle way allowed for Layher scaffold spindles
in combination with nivtec alu load distributor legs with removable load distributor / leg cork

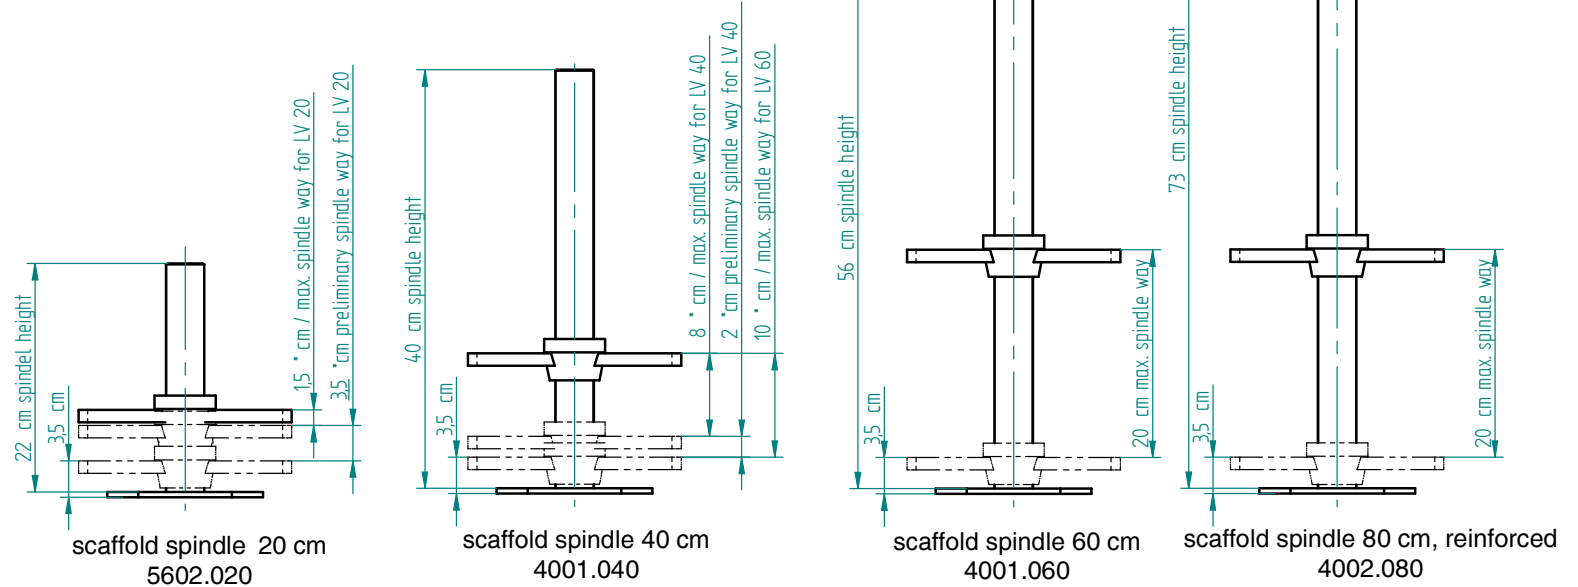
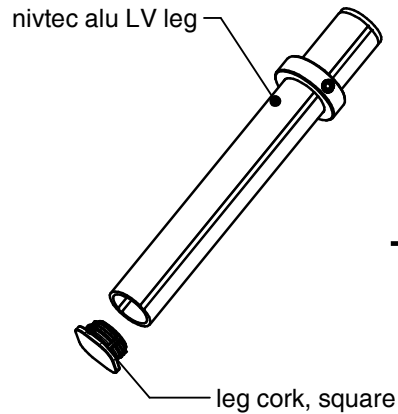


chart 1: maximum permissible spindle way

| stage heights +/- 0,5 cm height = top of platform | Layher spindle | max. spindle way allowed | Layher scaffold spindle + nivtec LV-leg for stage height |
|--|--|-----------------------------|---|
| 27,5 cm – 29 cm | 20 cm | 1,5 cm* | 20 cm |
| 43,5 cm – 48,5 cm | | 5 cm | 40 cm |
| 45,5 cm – 53,5 cm | 40 cm | 8 cm* | 40 cm |
| 63,5 cm – 73,5 cm | | 10 cm | 60 cm |
| 63,5 cm – 83,5 cm** | 60 cm | 20 cm | 60 cm |
| 83,5 cm – 103,5 cm** | | 20 cm | 80 cm |
| 83,5 cm – 103,5 cm** | | 20 cm | 80 cm |
| 103,5 cm – 123,5 cm** | | 20 cm | 100 cm |
| 123,5 cm – 143,5 cm*** | 80 cm | 20cm | 120 cm |
| 143,5 cm – 163,5 cm*** | | 20 cm | 140 cm |
| 163,5 cm – 183,5 cm*** | | 20 cm | 160 cm |
| 183,5 cm – 200,0 cm*** | | 20 cm | 180 cm |
| * | when using a leg 20 cm a preliminary spindle way of 3,5 cm is mandatory when using a leg 40 cm a preliminary spindle way of 2 cm is mandatory | | |
| ** | diagonal bracing stage heights from 80 cm, variant 4 tube length depends on size of legs | | |
| *** | additional horizontal bracing for stage heights > 140 cm | | |

2 additional Layher scaffold spindles (LS) complement the product range in 2022.

In combination with nivtec LV legs they allow for more flexibility not only at low heights but also in case of considerable differences in altitudes.


Precondition for use of all Layher spindles is an exact adherence to all regulations regarding maximum spindle way and bracing.

chart 2:


specification of bracing material for bracing variant 4 (alu tubes with Layher couplers)

| diagonals to be used for bracing variant 4 | | | |
|---|------------------|--|--|
| for leg size | for leg distance | Art.No. | article description |
| 80 – 100 cm | 100 / 85 cm | 200 31 1 | alu diagonal BL: 100/ 85 cm BH: 80-100cm L: 1300 mm |
| 80 – 100 cm | 200 / 185 cm | 200 31 3 | alu diagonal BL: 100/ 85 cm BH: 80-100cm L: 2250 mm |
| >100 – 140 cm | 100 / 85 cm | 200 31 2 | alu diagonal BL: 100/ 85 cm BH: >100-140 cm L: 1500 mm |
| >100 – 140 cm | 200 / 185 cm | 200 31 4 | alu diagonal BL: 200/185 cm BH: >100-140 cm L: 2400 mm |
| >140 – 180 cm | 100 / 85 cm | 200 32 4 | alu diagonal BL: 100/ 85 cm BH: >140-180 cm L: 1500 mm |
| >140 – 180 cm | 200 / 185 cm | 200 31 6 | alu diagonal BL: 100/ 85 cm BH: >140-180 cm L: 2500 mm |
| >180 – 200 cm | 100 / 85 cm | 200 32 0 | alu diagonal BL: 100/ 85 cm BH: >180-200 cm L: 1750 mm |
| >180 – 200 cm | 200 / 185 cm | 200 32 1 | alu diagonal BL: 100/ 85 cm BH: >180-200 cm L: 2750 mm |
| horizontals to be additionally used for bracing variant 4 | | | |
| for leg distance | Art.No. | article description | |
| 100 / 85 cm | 200 31 7 | alu horizontal BL: 100/ 85 cm L: 1100 mm | |
| 200 / 185 cm | 200 31 5 | alu horizontal BL: 200/185 cm L: 2100 mm | |

Stage 3.1

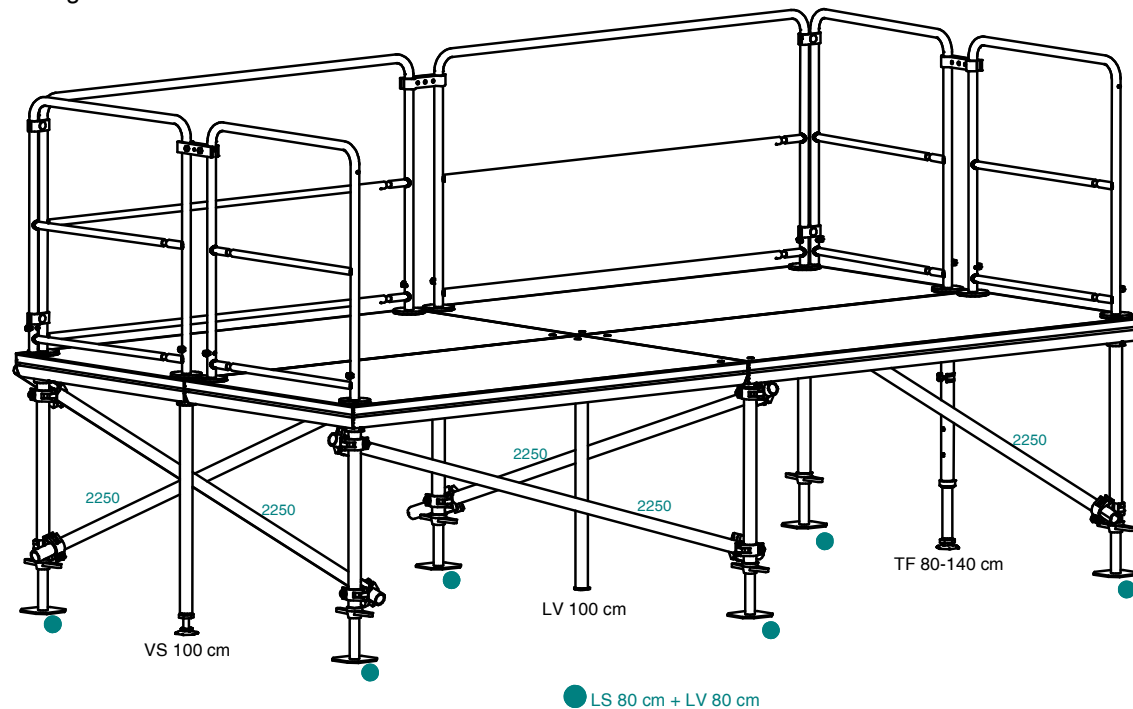

Gallery 3.2

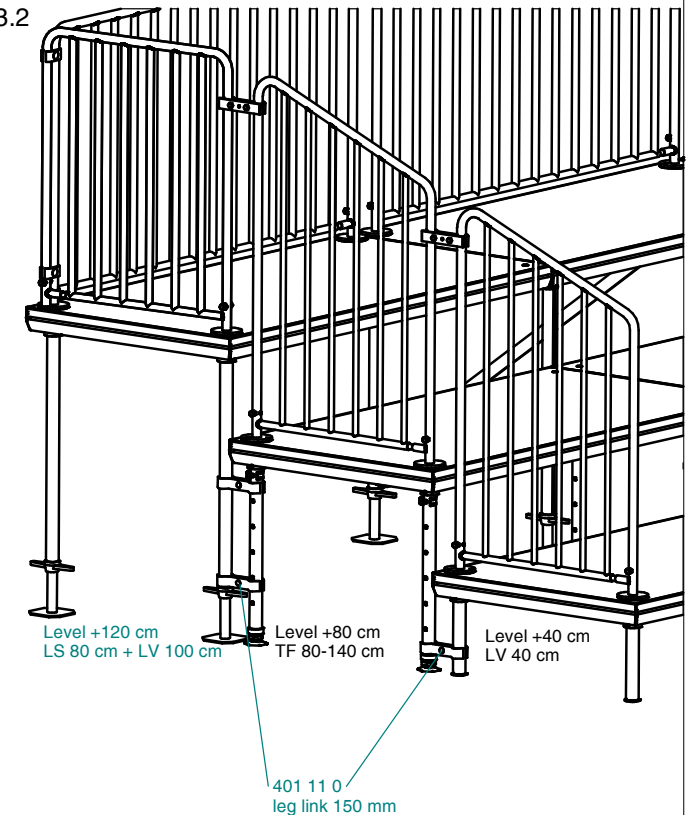


mixed installation

The nivtec staging system offers a wide range of leg versions. All nivtec original legs, equipped with thread adapter and load ring, may be installed under the following conditions:

- All approved nivtec leg versions can be used for **stages**. The bracing is carried out according to the nivtec alu bracing principle. The legs connected with braces must be of the same leg version (see sample drawing 3.1). Diagonal braces (for stage heights ≥ 80 cm) and additional horizontal braces (for stage heights > 140 cm) have to be made of aluminium.
- All approved nivtec leg variants can be used for **galleries**, provided that for each level only one leg version is used (see sample drawing 3.2). The bracing is carried out in accordance with the nivtec alu bracing principle. Diagonal braces and horizontal braces have to be made of aluminium.
- **When using Layher spindles** in combination with nivtec LV legs in standard or special sizes the maximum spindle way of 20 cm (see sample drawing 3.3) has to be observed.
- For galleries which are set up completely or in parts with Layher spindles LS + LV legs an identical leg distance of 15 cm between all levels is mandatory (see sample drawing 3.2)

3.3 spindle way scaffold spindle

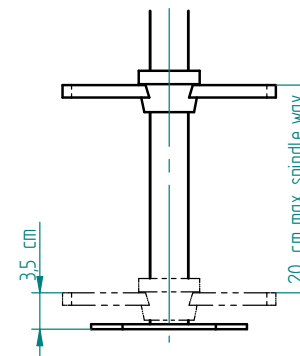



Rolling Risers with castor wheels 10 cm and 16 cm in comparison

Rolling risers may only be used on flat and level surfaces.
Permitted load capacities may not be exceeded.
max. construction height without diagonal bracing: 80 cm
max. stage size: 24 m²

The set-up is carried out as specified in the nivtec assembly instructions
according to the **nivtec principle 4-2-2-1**.


*with swivel wheel ø10 cm
*wheel capacity 200 kg
*permitted stage load capacity 1,5 kN/m²

*with swivel wheel ø16 cm
*wheel capacity 350 kg
*permitted stage load capacity 2,5 kN/m²

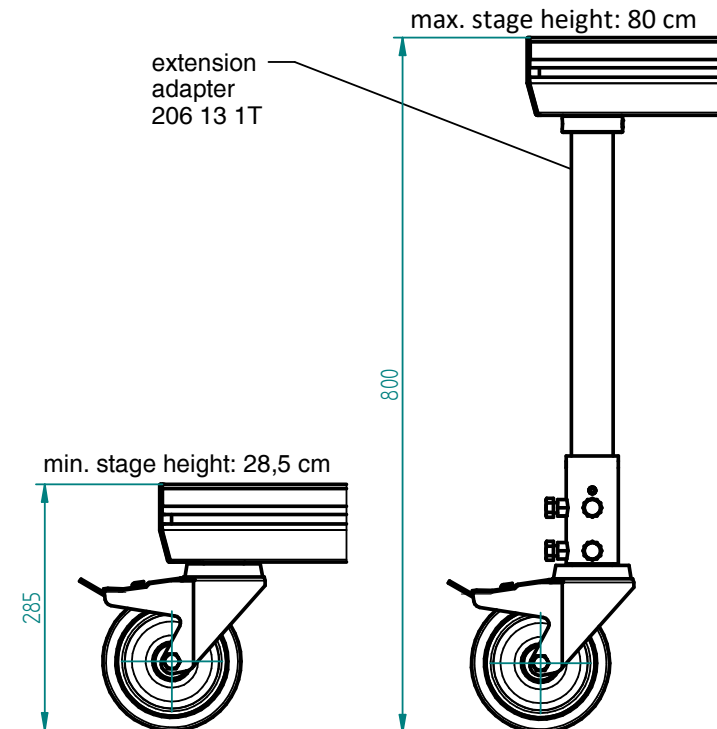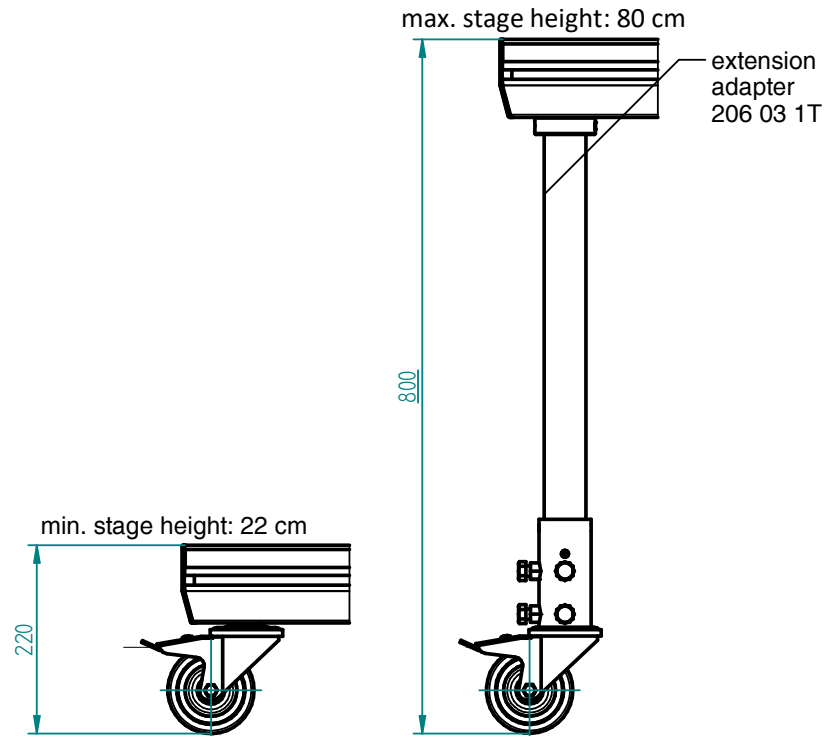

NEW: tier height 16,66 cm with matching modular plug-in vertical bar safety rails
as alternative to tier height 20 cm with matching modular plug-in standard rails

removed from the product range:
one-piece vertical bar safety rails
for 2- to 7-step stairways

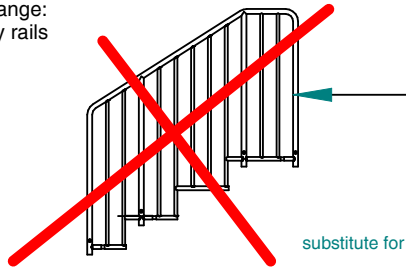


312 09 1
vertical bar safety rail,
stairway, final part on step A

312 03 1
vertical bar safety rail,
stairway, double middle part

312 02 1
vertical bar safety rail,
stairway, middle part

312 01 1
vertical bar safety rail,
stairway, first part

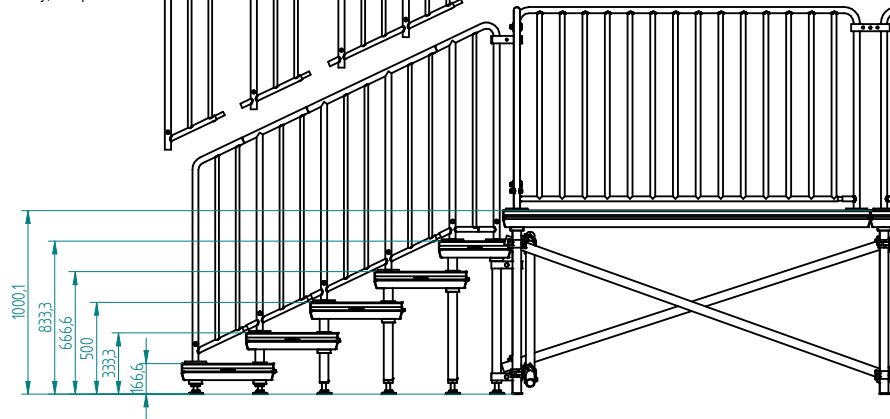


vertical bar safety rail, stairway
tier height 16,66, modular plug-in
for 5-step stairway
for stage height: 100 cm

alternative to

standard safety rail, stairway
tier height 20, modular plug-in
for 4-step stairway
for stage height: 100 cm


removed from the product range:
one-piece standard safety rails
for 3- or 4-step stairways

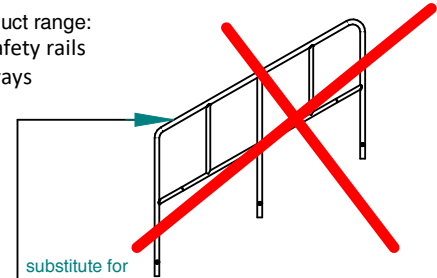




304 09 0
standard safety rail,
stairway, final part on step A

304 03 0
standard safety rail,
stairway, double middle part

304 01 0
standard safety rail,
stairway, first part

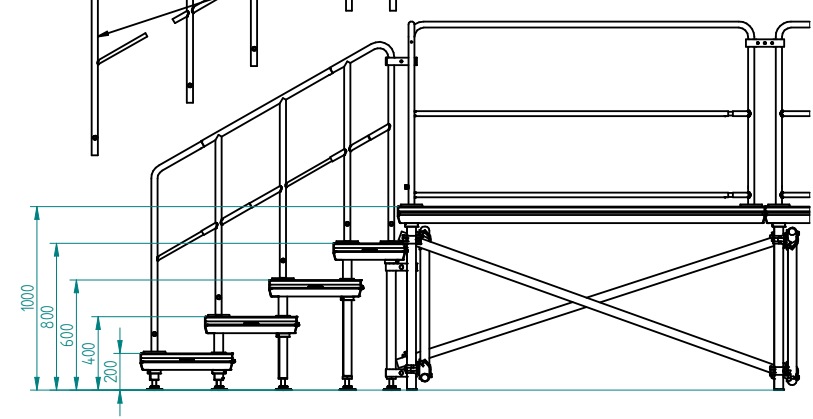


Detail A

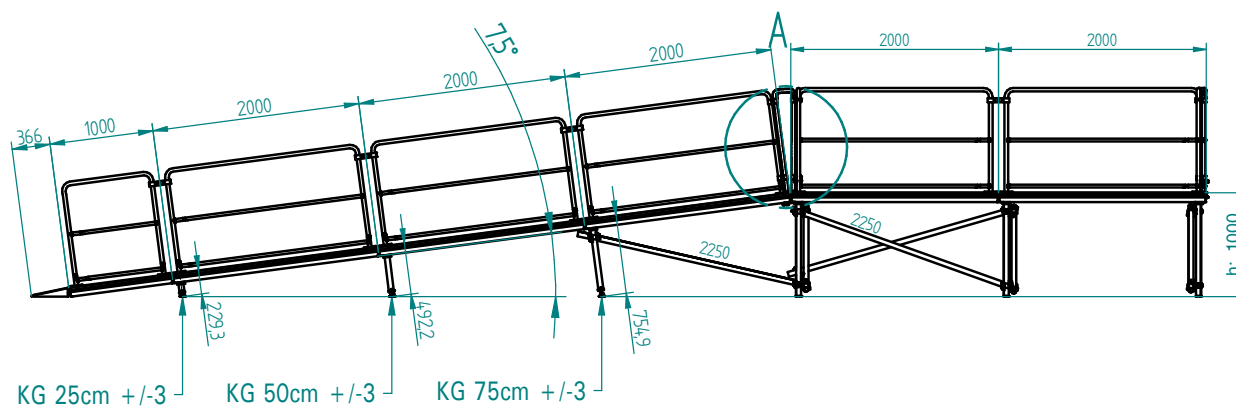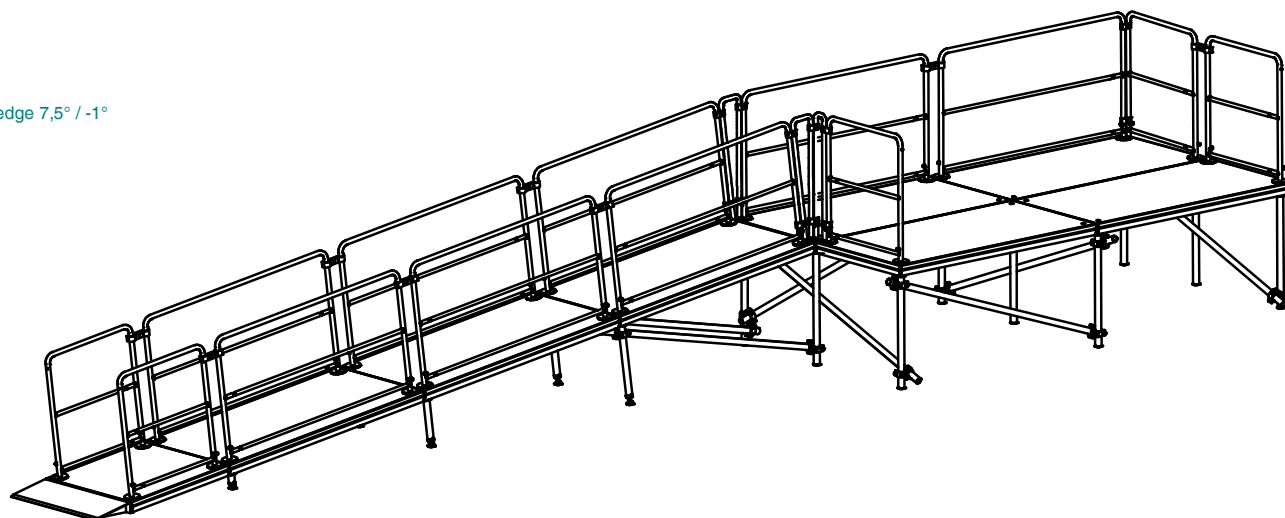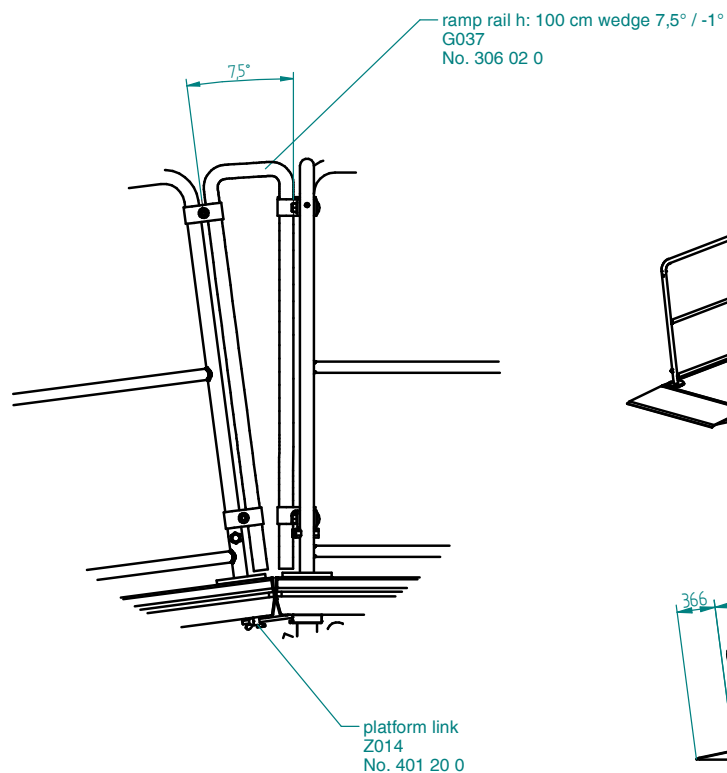

| Overview of ramps 7,5°: max. 6 different KG legs for stage heights up to 100 cm | | | | | | | | | | |
|---|-------|-------------------------------|----------------|------------|----------------|------------|----------------|------------|----------------|------------|
| G037 / No.:306 02 0 / ramp rail H: 100 cm wedge 7,5° / -1° | | | | | | | | | | |
| h: [m] | angle | length [m] (without wedge) | KG [adj.range] | | KG [adj.range] | | KG [adj.range] | | KG [adj.range] | |
| 0,4 | 7,2° | 2,5 | 15cm+2/-1 | [160,2mm] | | | | | | |
| 0,6 | 7,4° | 4 | 35cm+/-3 | [355,5mm] | | | | | | |
| 0,8 | 6,8° | 6 | 35cm+/-3 | [336 mm] | 60cm+/-3 | [574,8 mm] | | | | |
| 1,0 | 7,5° | 7 | 25cm+/-3 | [229,3 mm] | 50cm+/-3 | [492,2 mm] | 75cm+/-3 | [754,9 mm] | | |
| 1,2 | 7,5° | 8,5 | 15cm+2/-1 | [163,6mm] | 45cm+/-3 | [427,6 mm] | 70cm+/-3 | [691,5mm] | 95cm+/-3 | [955,4mm] |
| 1,4 | 7,5° | 10 | 35cm+/-3 | [362,3 mm] | 65cm+/-3 | [627 mm] | 90cm+/-3 | [891,8 mm] | 115cm+/-3 | [1156,3mm] |

Detail A

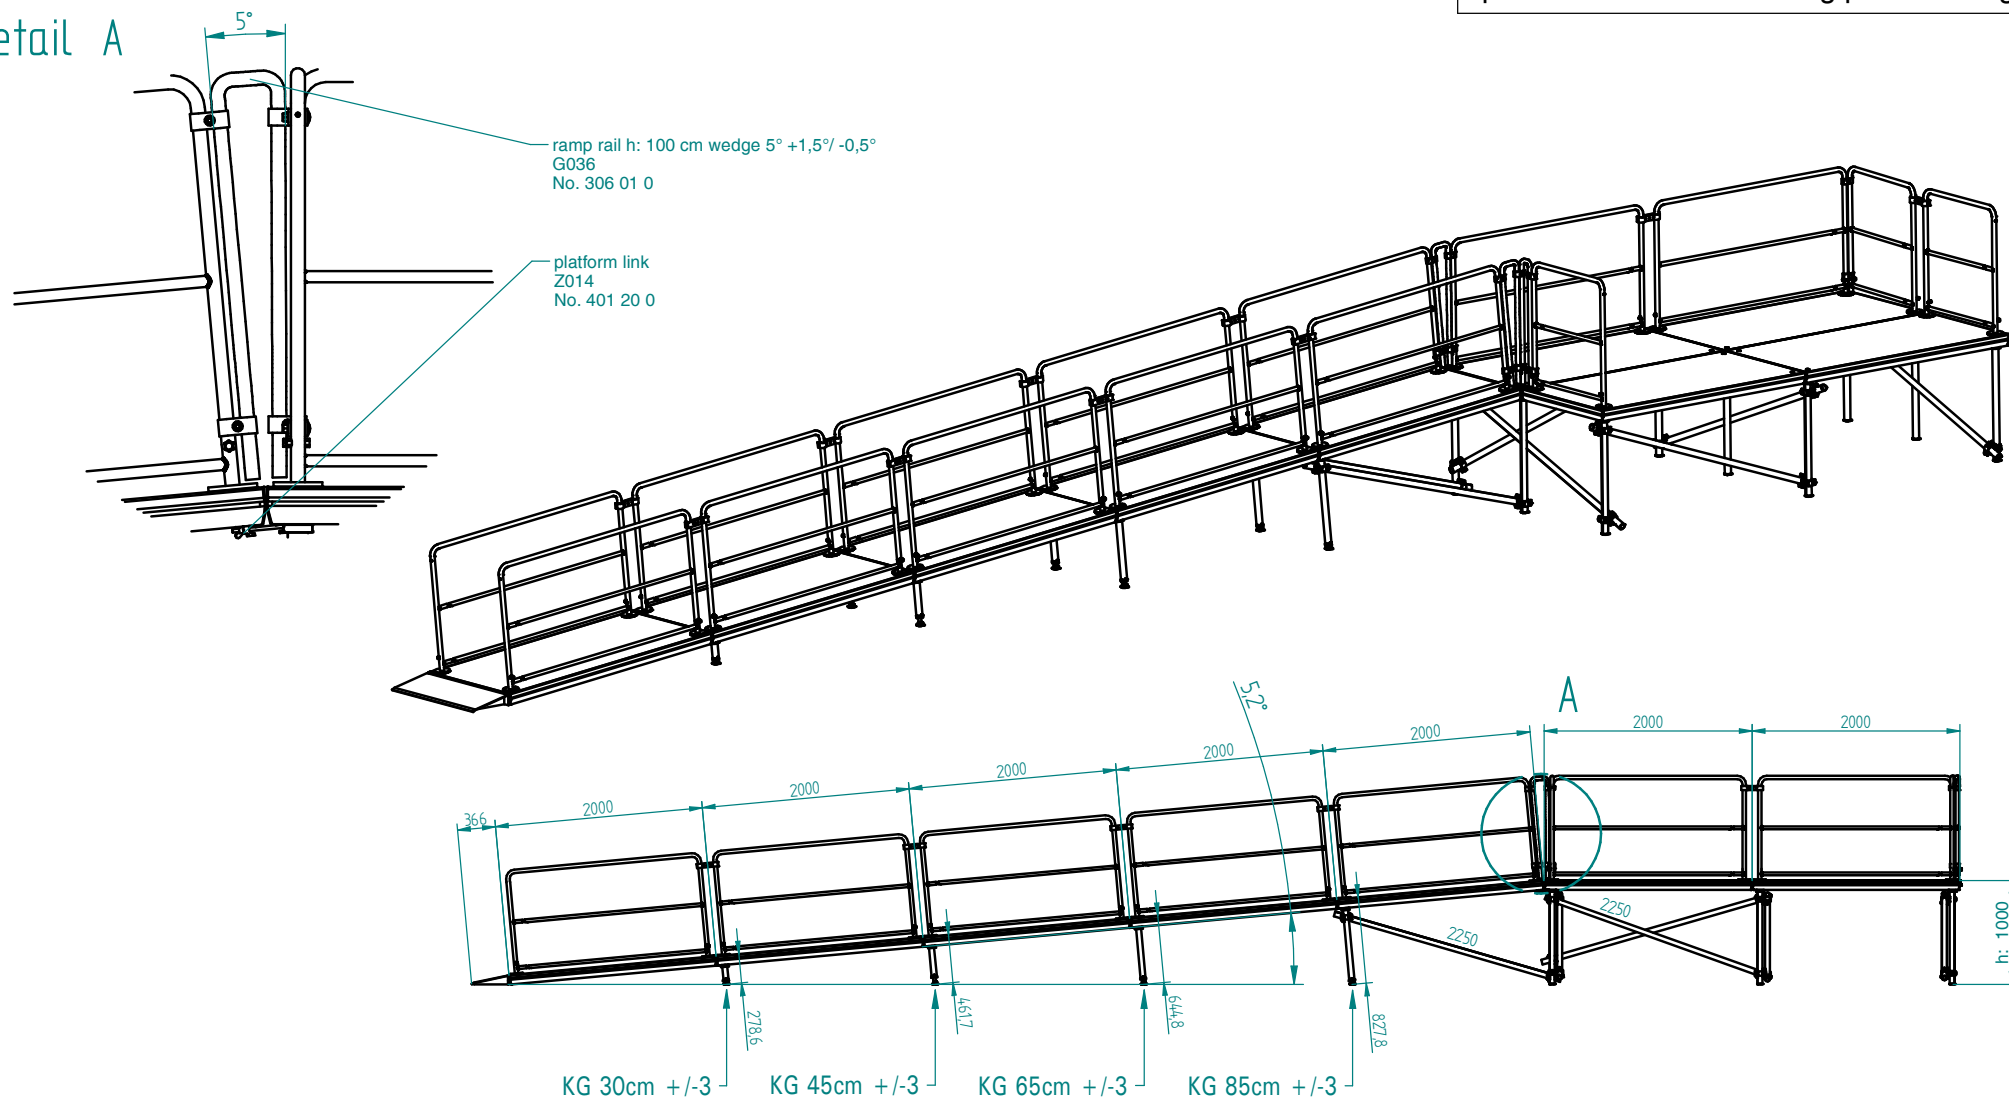


Overview of ramps 5°: max. 4 different KG legs for stage heights up to 100 cm

G036 / No. 306 01 0 / ramp rail H: 100 cm wedge 5° +1,5°/-0,5°

| h: [m] | angle | length [m] (without wedge) | KG [adj. range] | KG [adj. range] | KG [adj. range] | KG [adj. range] | KG [adj. range] | KG [adj. range] |
|--------|-------|-------------------------------|---------------------|---------------------|--------------------|--------------------|----------------------|----------------------|
| 0,4 | 4,5° | 4 | 25cm+2/-1 [250,5mm] | | | | | |
| 0,6 | 4,9° | 6 | 25cm+/-3 [266 mm] | 45cm+/-3 [437 mm] | | | | |
| 0,8 | 5,1° | 8 | 30cm+/-3 [273,6mm] | 45cm+/-3 [452,3mm] | 65cm+/-3 [630,8mm] | | | |
| 1,0 | 5,2° | 10 | 30cm+/-3 [278,6mm] | 45cm+/-3 [461,7mm] | 65cm+/-3 [644,8mm] | 85cm+/-3 [827,8mm] | | |
| 1,2 | 5,3° | 12 | 30cm+/-3 [282,2mm] | 45cm+/-3 [467 mm] | 65cm+/-3 [653,7mm] | 85cm+/-3 [839,6mm] | 105cm+/-3 [1025,6mm] | |
| 1,4 | 5,4° | 14 | 30cm+/-3 [283,5mm] | 45cm+/-3 [471,7 mm] | 65cm+/-3 [660 mm] | 85cm+/-3 [848,2mm] | 105cm+/-3 [1036,4mm] | 120cm+/-3 [1224,5mm] |

Detail A

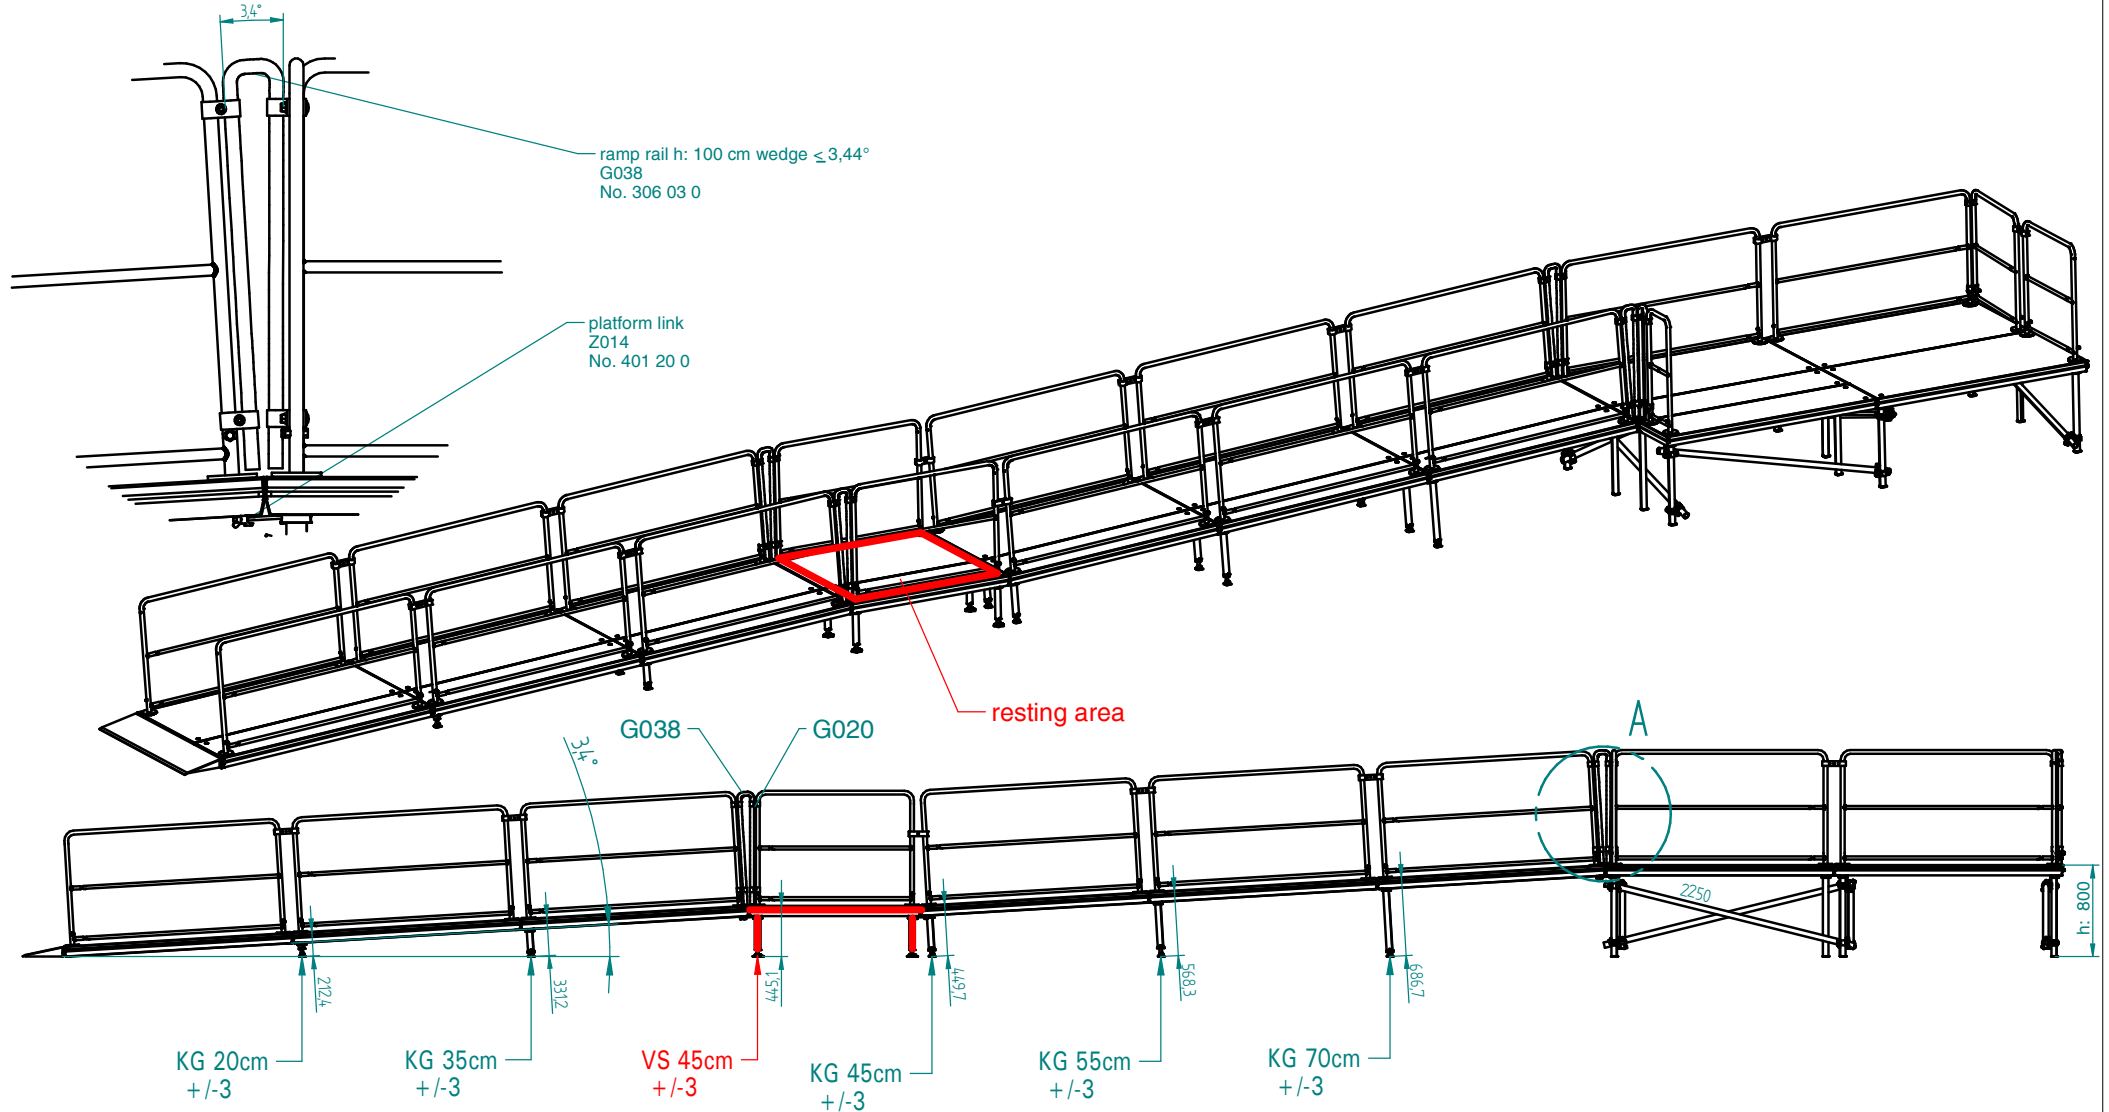


Overview of ramps $3,44^\circ = 6\%$

G038 / Nr.: 306 03 0 / ramp rail H: 100 cm wedge, $\leq 3,44^\circ$


| h: [m] | angle | length [m] (without wedge) | KG [adj. range] | | KG [adj. range] | | resting area VS [adj. range] | KG [adj. range] | | KG [adj. range] | | KG [adj. range] | |
|--------|--------------|-------------------------------|-----------------|-----------|-----------------|-----------|---------------------------------|-----------------|----------|-----------------|----------|-----------------|-----------|
| 0,2 | $3,2^\circ$ | 2 | | | | | | | | | | | |
| 0,4 | 3° | 6 | 20cm+/-3 | [196,9mm] | 30cm+/-3 | [300,5mm] | | | | | | | |
| 0,6 | $3,26^\circ$ | 10,5 | 20cm+/-3 | [206,8mm] | 35cm+/-3 | [320,5mm] | 40cm+/-3 | [429,9mm] | 45cm+/-3 | [434,4mm] | 55cm+/-3 | [548,0mm] | |
| 0,8 | $3,4^\circ$ | 13,5 | 20cm+/-3 | [212,4mm] | 35cm+/-3 | [331,2mm] | 45cm+/-3 | [445,1mm] | 45cm+/-3 | [449,7mm] | 55cm+/-3 | [568,3mm] | 70cm+/-3 |
| | | | | | | | | | | | | | [686,7mm] |

connecting options for rails of various ascents with stage rails at the rear at an angle of 180°


optimisations of the existing product range

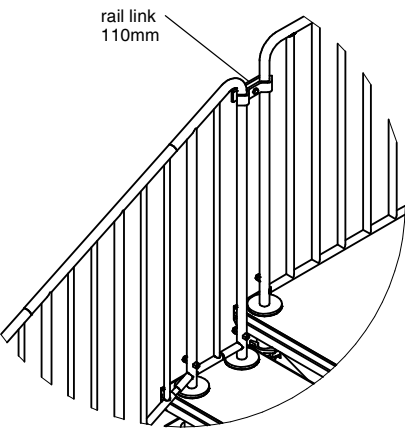

vertical bar stairway rail tier height 16,66 cm

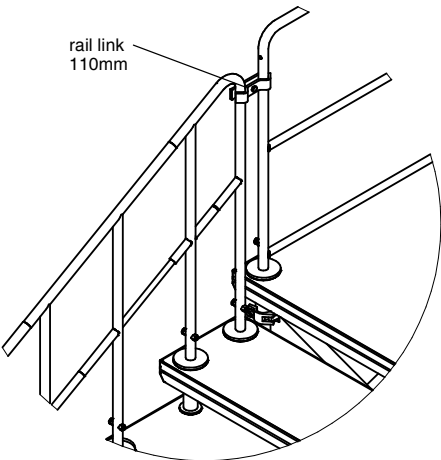

standard stairway rail tier height 20 cm



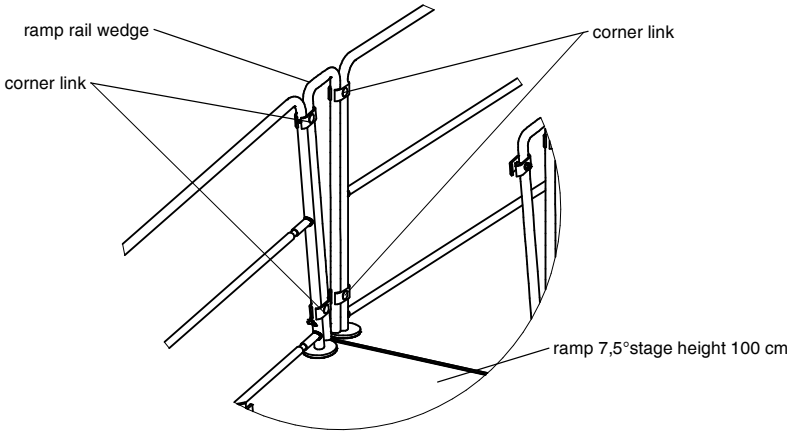


8. Enhancement of connecting options for rails
8.1 Connection of ascent to stage at angle 180°

No. 8.1 Date: 20.09.2022 Sheet: 1 / 3

Connecting options for rails of various ascents with stage rails at the side at angle 90°

Variant A: use of rails in special sizes

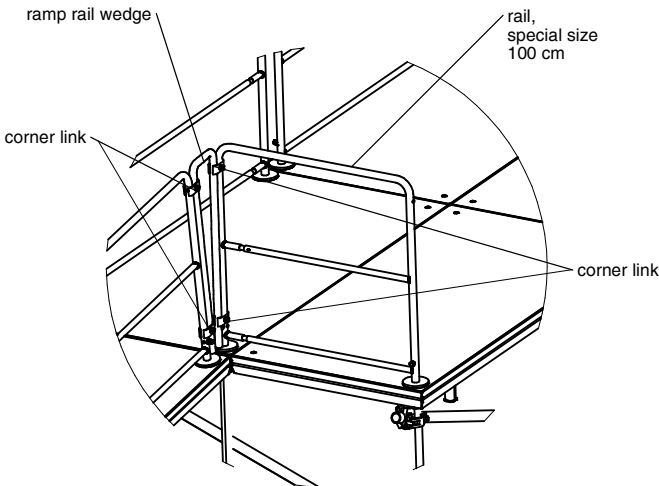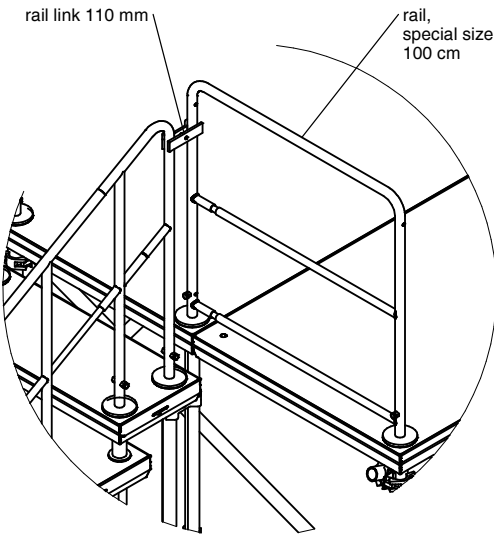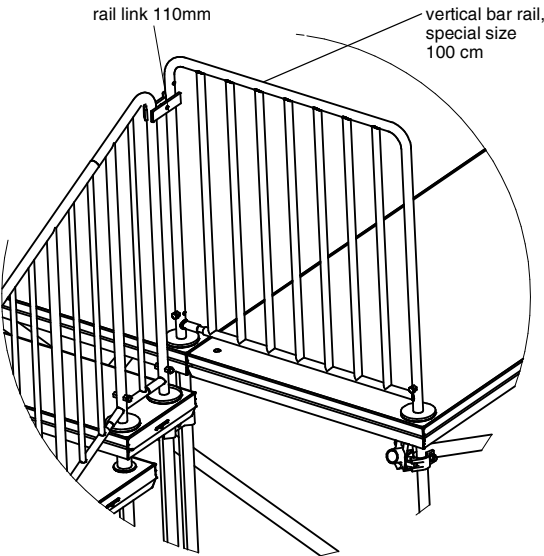


8. Enhancement of connecting options for rails
8.2 Connection of ascent to stage at 90° angle
- use of rails in special sizes


No. 8.2 Date: 20.09.2022 Sheet: 1 / 3

Connecting options for rails of various ascents with stage rails at the side at angle 90°


Variant B = better: use of 10 cm + 85 cm rails as substitute for rail in special size 100 cm

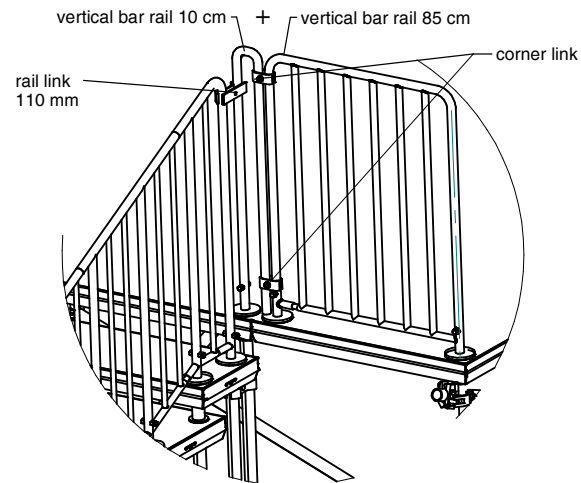

vertical bar stairway rail tier height 16,66 cm

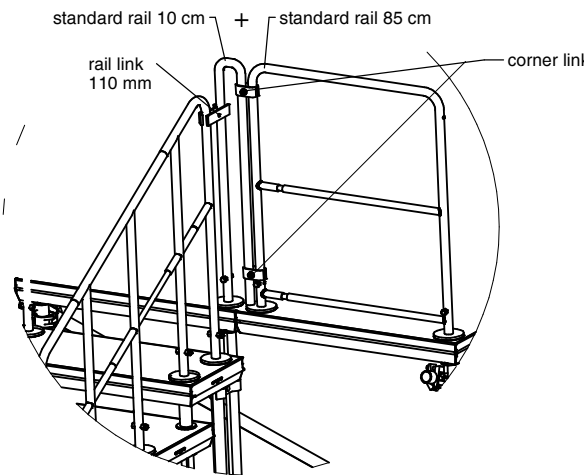

standard stairway rail tier height 20 cm

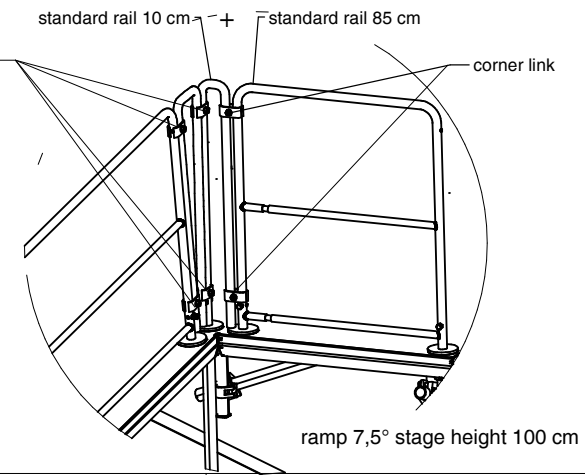

ramp 7,5° stage height 100 cm






8. Enhancement of the connecting options for rails
8.3 Connection of ascent to stage at angle 90°
- use of 10 cm rail

No. 8.3 Date: 20.09.2022 Sheet: 2 / 3

Connecting options for rails of various ascents at the side at angle 90° without stage rails

Variant C: use of 15 cm rail as substitute for stairway rail final part ending on stage

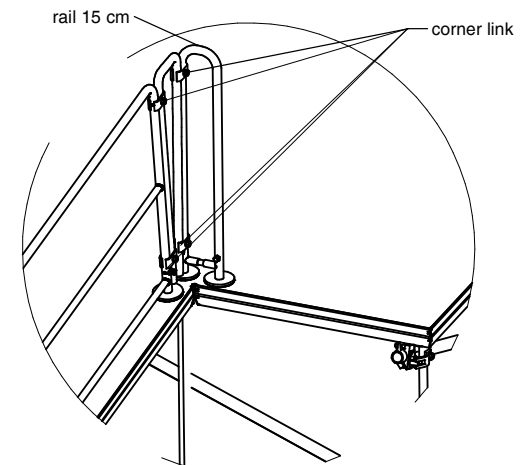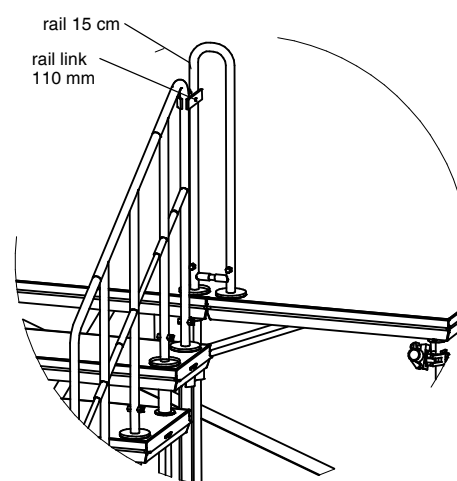
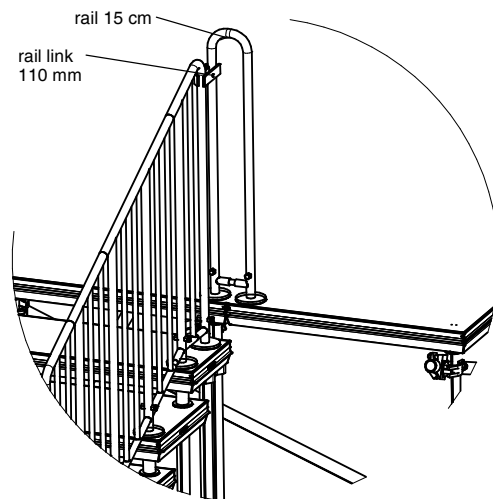


8. Enhancement of the connecting options for rails
8.4 Connection of ascent to stage at angle 90°
- use of 15 cm rail


No. 8.4 Date: 20.09.2022 Sheet: 2 / 3

2 rails as substitutes for 10

Thanks to their versatility in use, just 2 rails in 10 cm and 15 cm substitute various previous rails that are being eliminated from the product range.

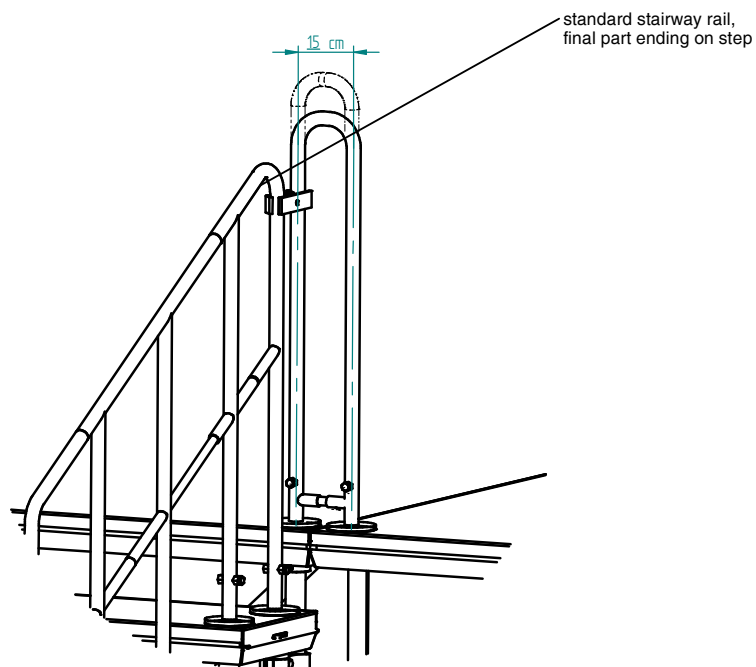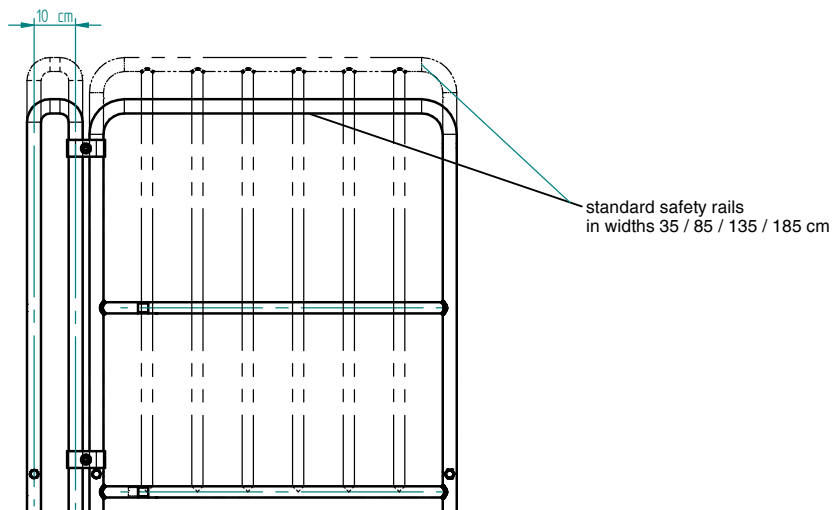

optimisations of the existing product range

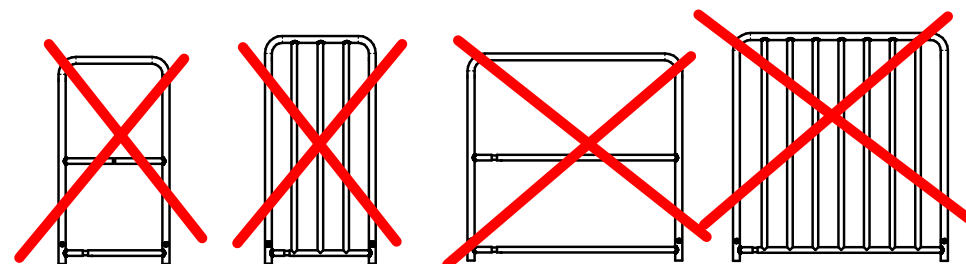


rail H: 100 cm
W: 50 cm
301 06 0


rail H: 110 cm
W: 50 cm
303 06 0

rail H: 100cm
W: 100 cm
301 07 0


rail H: 110 cm
W: 100 cm
303 07 0

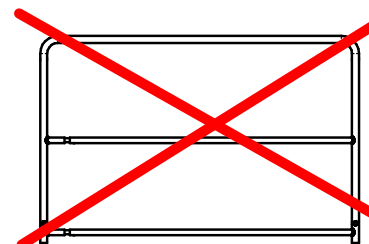


rail H: 100cm
W: 150 cm
301 05 0

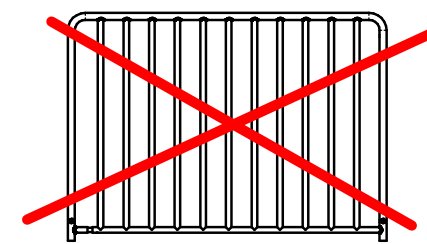


rail H: 110cm
W: 150 cm
303 05 0




rail H: 100 cm
final part
304 08 0




rail H: 100 cm
final part
304 07 0




rail H: 100 cm
3-step stairway
304 10 0

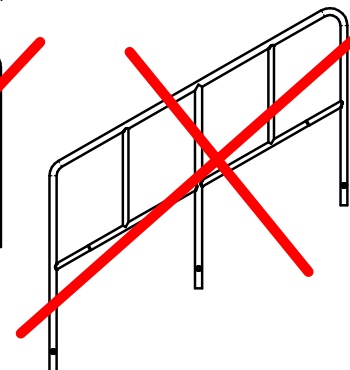

rail H: 100 cm
4-step stairway
304 12 0

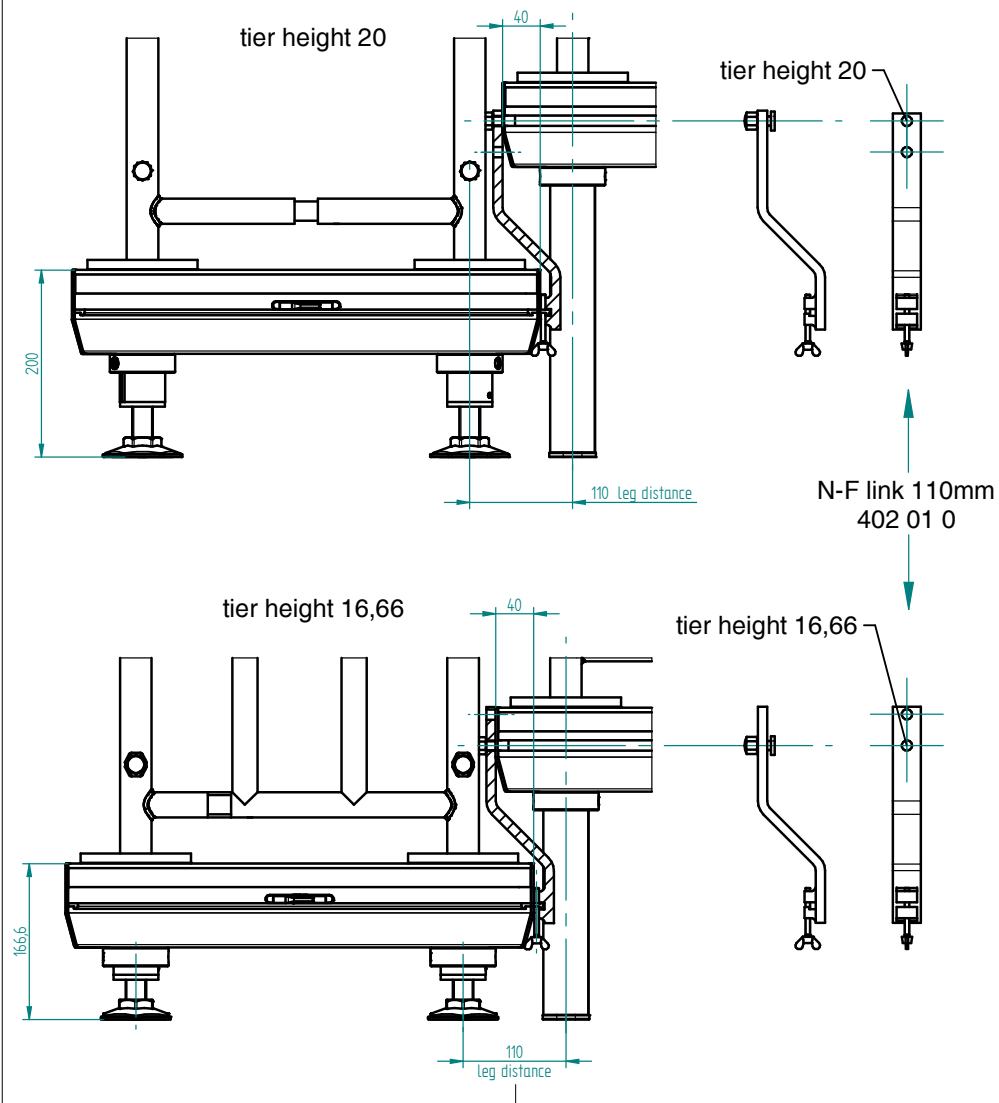


NEW:

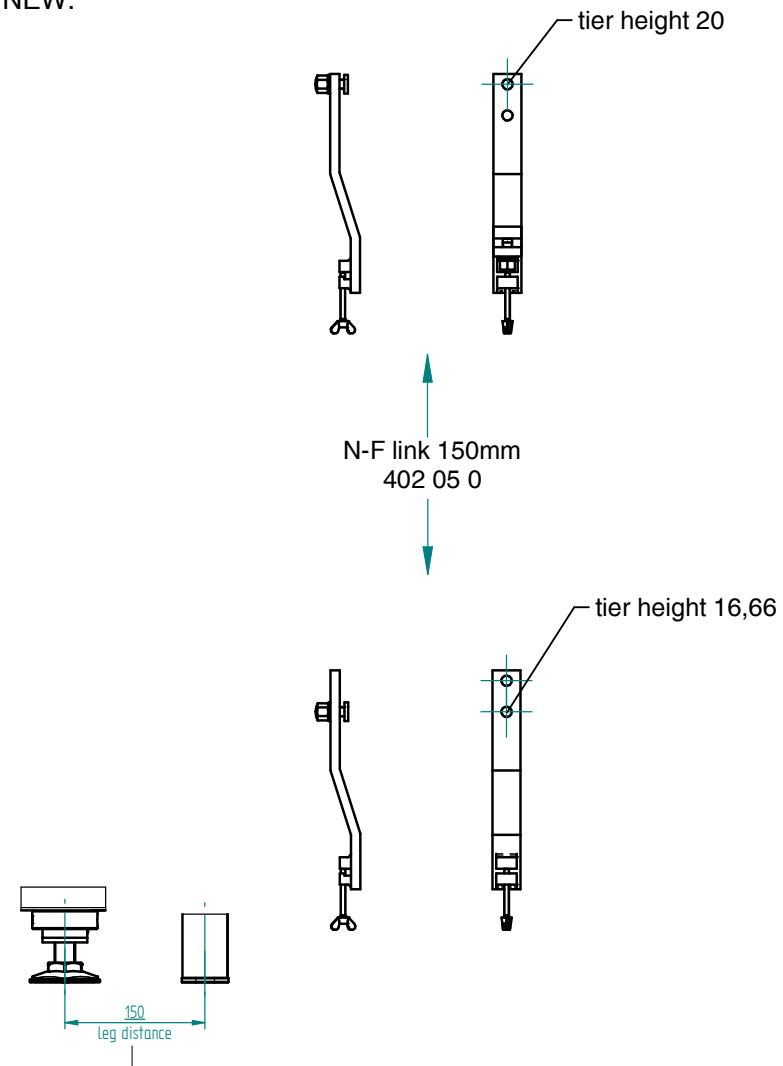


The standard N-F link for leg distance 110 cm cannot be used for tier height 20 cm only but also for new tier height 16,66 cm. Alternatively for both tier heights an N-F link for leg distance 150 cm is added to the range of articles. Thus the N-F links are available for any set-up options of stairways and galleries.

new execution since 01.03.2022

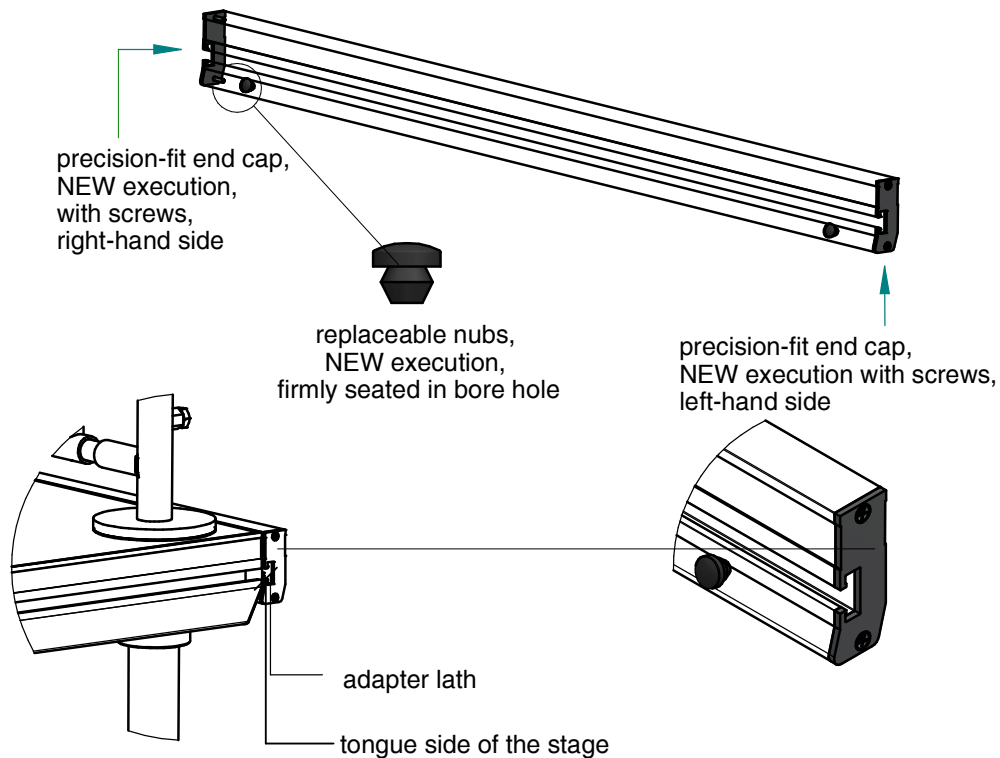



old execution since March 2015
(a.k.a. "DIY solution")

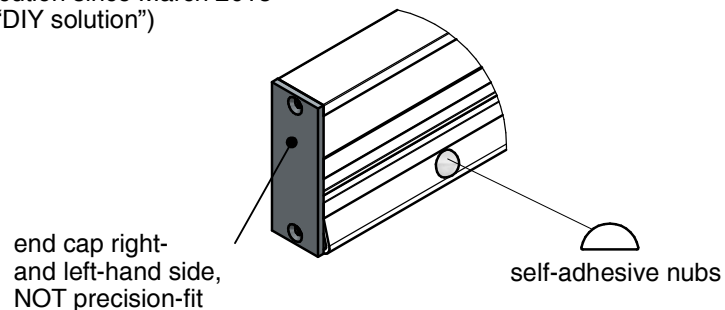



optimisations of the existing product range

The new execution of the adapter lath is equipped with replaceable plastic nubs that are firmly seated in a bore hole. The new, precision-fit end caps can be attached at the right and left side. Comparison to the old execution: illustration 10.1. Both of these innovations can be retrofitted (see 10.2).

The adapter laths provide the option of connecting a stage to a fix object (see 10.3). It is mandatory to respect the safety instructions (see 10.4).

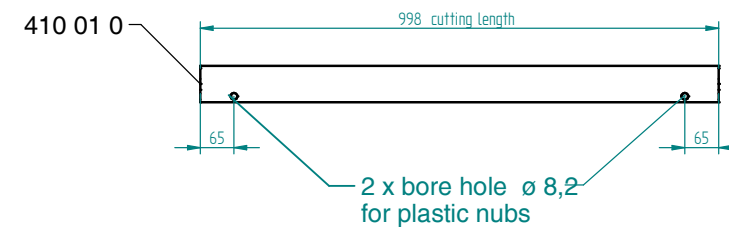
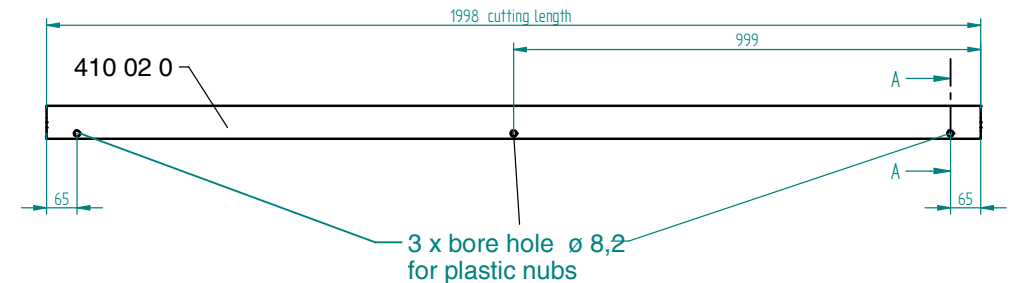


View A-A

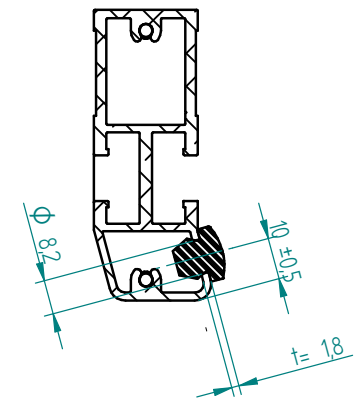


optionally: fasten end cap at the left and the right side with 2 countersunk screws ISO7050 3.5 x 16 each.

Detail A

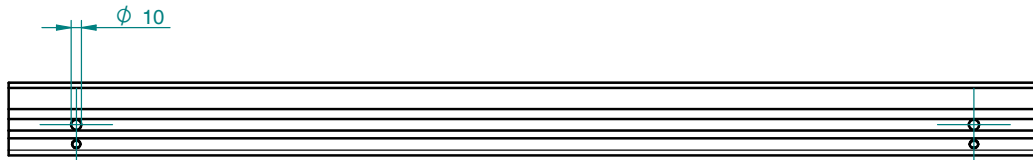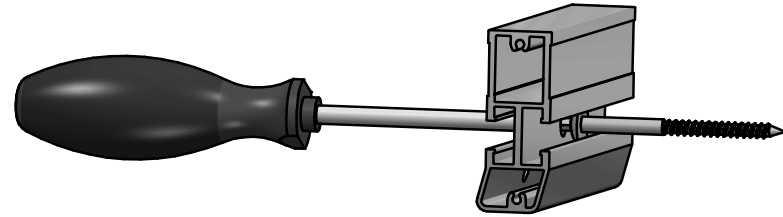

number of bore holes per adapter lath: for lengths < 100 cm at least 2 holes
for lengths > 100 cm at least 3 holes


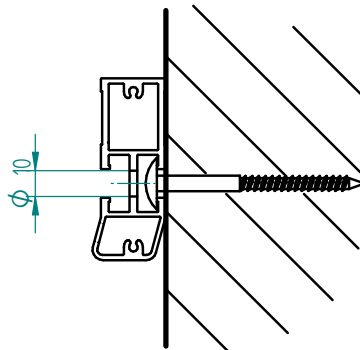


Through holes of Ø 10 mm diameter are to be drilled into the centre bridge of the adapter lath profile.


The screws are inserted laterally into the rear groove and positioned under the through holes. The screws are tightened via the through hole using a suitable screwdriver.

screws to be used:

- concrete and wood: 8.0x80 TX40 (for masonry: dowels required)
- metal: Round-head screws M8x50

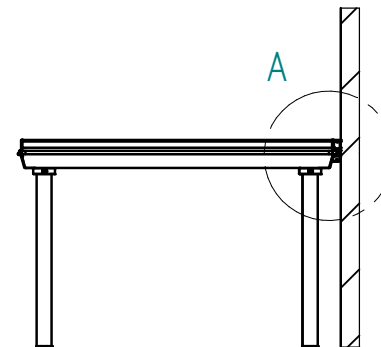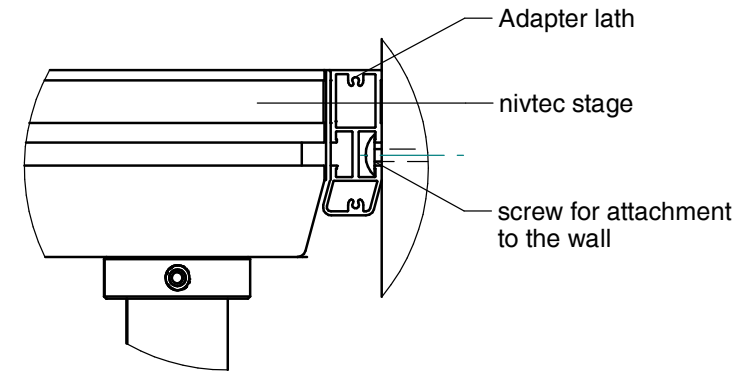

correct

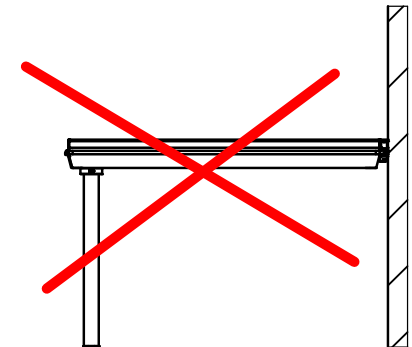

wrong

Adapter laths do **NOT** replace the legs as they are not load-bearing elements. Therefore, they may only be used as a connecting element.

The set-up is carried out as specified in the nivtec set-up instructions according to **nivtec-Prinzip 4-2-2-1**